


# Assemble Manual

## PART ONE - ASSEMBLE THE WHEELS



② & ③

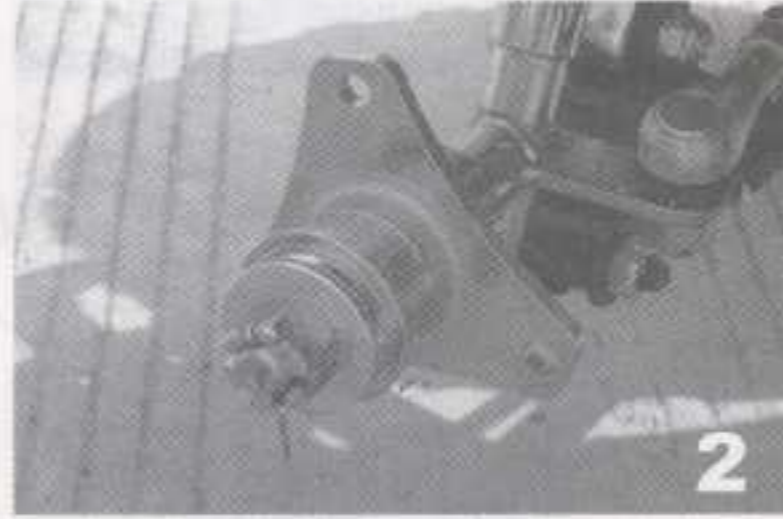

2




3

①



4

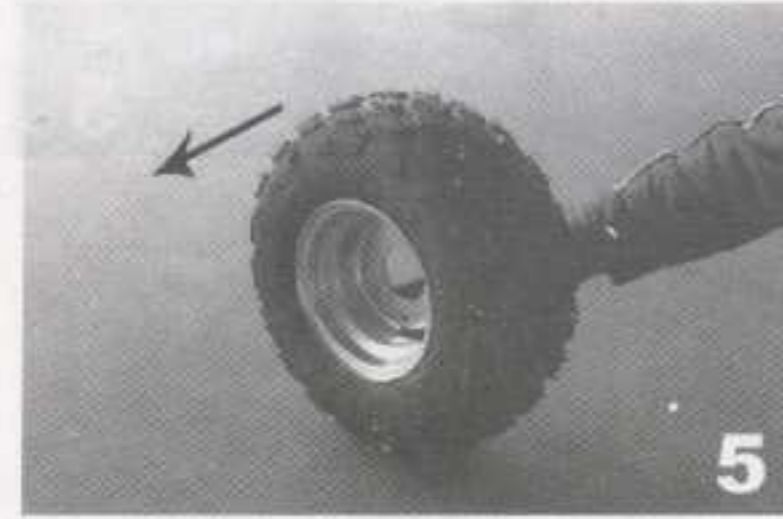

5



6

PART	QTY	NOTE
① REAR/FRONT WHEEL	2*2	IN CARTON
② NUT	3/WHEEL	ATTACHED
③ BOLT	3/WHEEL	ATTACHED

1, The ②nuts and ③bolts are fixed in the flange.

2, Loose the ②nut and ③bolt.

3, Slide ①wheel onto axles.

4, Secure ①wheel with nuts and bolts.

### Attention

1, The valve of wheel should be positioned forth.

2, The pattern of front/rear tire should be adjusted as arrow direction (as picture 5&6).

## PART TWO - ASSEMBLE BATTERY



①

### Attention

1, Please notice the ① sign of Positive lead and Negative lead.

2, To connect the red line to Positive lead and v.v.



## PART THREE - ASSEMBLE THE PROTECTION SHELF



PART	QTY	NOTE
①PROTECTION SHELF	1	IN CARTON
②NUT	4	ATTACHED
③BOLT	4	ATTACHED

- 1, The uninstalled ①protection shelf.
- 2, Loose the ②nut and ③bolt upside.
- 3, Loose the ②nut and ③bolt downside
- 4, Fix the ①protection shelf onto frame.
- 5, Secure ①protection shelf with ②nut and ③bolt

## PART FOUR - ASSEMBLE THE HANDLE BAR

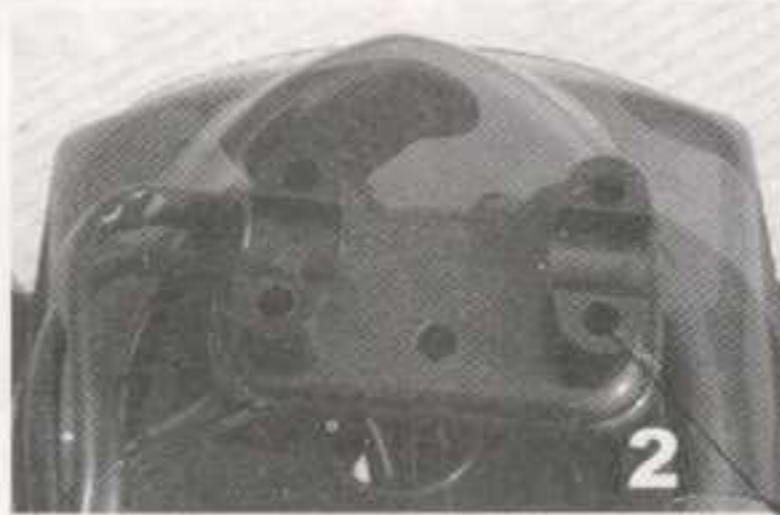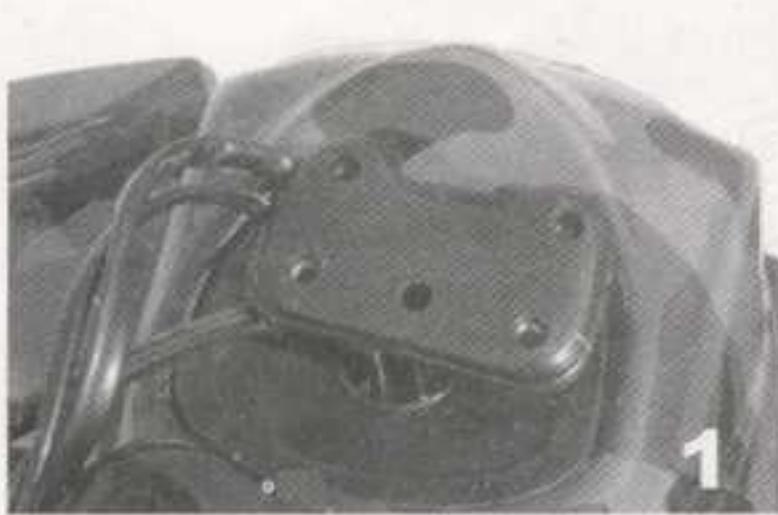

PART	QTY	NOTE
①HANDLE BAR	1	IN CARTON
②BOLT	4	ATTACHED
③④BRACKET	2	ATTACHED

- 1, Every item is dismantled.
- 2, Place the ③bracket-downside.
- 3, Put up the ①handle bar and place the pattern part in the middle.
- 4, Secure the ①handle bar with the ④bracket-upside.
- 5, Use the L-shape tool to fasten the ②bolts.